



DispenserONE FLEXI Thermoscan is a 10 Liter capacity dispenser of sanitizing chemicals, designed to be installed in small to medium-sized sites such as supermarkets, franchises and public offices. Furthermore, it allows temperature measurement and mask recognition to enable an output relay typically used to open a door or a turnstile.

MODELS:


- DispenserONE FLEXI Thermoscan

KEY FEATURES and BENEFITS

- Maximum tank capacity of 10 Litres allows more than 10.000 doses of sanitizing gel in average, minimizing the servicing due to tanks refilling/replacement, especially in places with high influx of people. The unit comes with a tank of 10 liters included in the package.
 - Touch free dispensing through proximity sensor guarantees maximum hygiene and safety.
 - Peristaltic dosing with single shot time adjustment ensures flexibility of the dispensing depending on the type of sanitizer to be dosed.
 - Robust design with metal enclosure, yet contained footprint of the unit, makes it suitable to every kind of facility.
 - Integrated level with audible alarm control gives direct warnings to the owner avoiding lack of disinfectant in the device.
 - Mains power supply.
- The unit is provided with wheels to allow easy transportation and placement; the metal basement is provided with holes for optional ground fixation.
 - Wide frontal flat surface ensures easy bespoke branding with custom logo and colour.
 - Key door lock secures chemical canister preventing from thefts or tampering.
 - On-board thermoscan and mask recognition system allows customers to use the output relay to enable, for example, the opening of a door or turnstile.
 - To enable the output relay, the customer can choose between four verification solutions:
 - Body temperature measurement, face mask detection and hand sanitizing
 - Body temperature measurement, face mask detection
 - Hand sanitizing
 - None (Output relay disabled)
 - Internal web server for settings via Wi-Fi with PC, smartphone or tablet to choose the type of verification to enable the relay and to upload customized audio messages.

| TECHNICAL FEATURES | |
|--------------------------|--|
| TYPE | DispenserONE® FLEXI Thermoscan/Mask |
| CERTIFICATIONS | CE, EAC |
| MAXIMUM TANK CAPACITY | 10 liters (included) |
| MINIMUM CANISTER OPENING | 32 mm |
| DISPENSING RATE | Adjustable dosing time from 0,2 to 2 seconds |
| POWER SUPPLY | 100÷240 Vac @50/60 Hz |
| ELECTRICAL CLASS | Class I (ground connected) |
| ACTIVATION | Touch free via proximity sensor |
| MAX CONSUMPTION | 40 W |
| OPERATING TEMPERATURE | 10-50°C |
| STORAGE TEMPERATURE | -20÷60°C |
| CASE MATERIAL | Zinc plated Iron |
| MAX UNITS PER PALLET | 6 |
| WEIGHT | 30 Kg |

DIMENSIONS

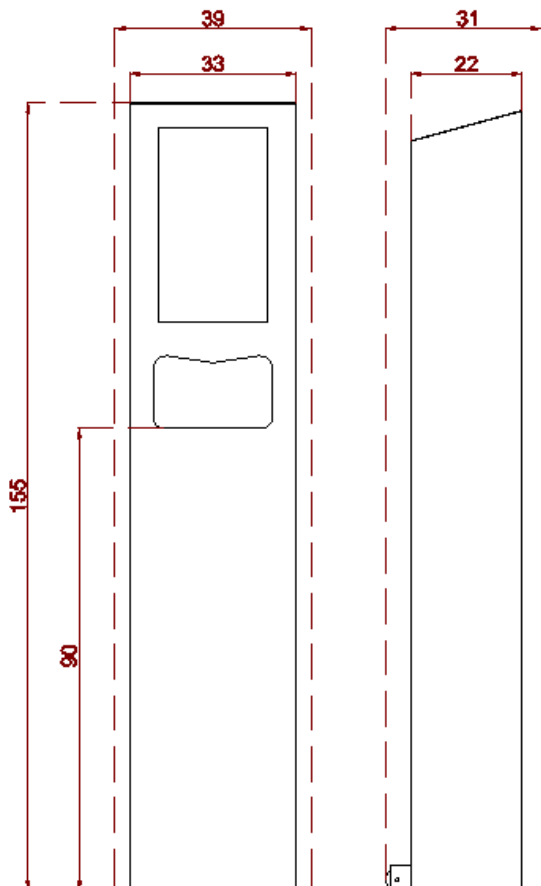

Your Choice,
Our Commitment